

ProLine® XE HEAT PUMP

The ProLine® XE heat pump water heaters from A. O. Smith are a cost effective energy-efficient option available for consumers who want to save money on their electric utility bills.

HOW DO THEY WORK?

- Absorbs ambient heat from the surrounding air to heat water using a compressor and environmentally-friendly R134a refrigerant
 - Self-contained heat pump unit is integrated into the top of the tank
 - Multiple operating modes to maximize efficiency and performance

INCREASED ENERGY EFFICIENCY

- Improved efficiency design to ensure available hot water at the lowest possible cost
- Up to a 3.45 Uniform Energy Factor (UEF) conserves energy and exceeds ENERGY STAR® qualifications

CHOICE OF OPERATING MODES

- Select from Efficiency, Hybrid, or Electric modes to match heating requirements to environmental conditions
- Hybrid mode automatically adjusts between compressor and element, depending upon heat requirements
- Vacation mode reduces operating costs and provides freeze protection during extended absence

BACKUP ELECTRIC ELEMENTS

- Long-lasting backup heating elements help heat water according to environmental conditions, demand, and the chosen operating mode

CoreGard™ ANODE ROD

- Anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods
- 66 and 80 gallon models have dual anodes for added protection

DRY FIRE PROTECTION

- Control system checks to ensure the tank is full of water during start up to prevent dry firing the heating elements

ELECTRONIC USER INTERFACE

- User-friendly electronic interface allows easy control of temperature setting, operating mode, and communicates diagnostics
- Easy to read temperature display (see back) shows temperature in °F or °C
- Advanced diagnostics convey error messages for service purposes and the last four error messages are saved in the control system memory

Commercial-Grade

- ProLine® XE Heat Pump are residential water heaters with commercial grade quality

OTHER FEATURES

- Ideal for basement installations; the compressor transfers heat to the water while dehumidifying and cooling the ambient air
- Washable air filter is easily removed for routine cleaning

OPTIONAL AIR DUCT ADAPTER KIT

- Permits installation in confined spaces

WARRANTY

- 10 year limited tank and parts warranty
- For complete information, consult written warranty or A. O. Smith



PERFORMANCE

| MODEL | SERIES | NOMINAL CAPACITY USG (L) | INPUT | | UNIFORM ENERGY FACTOR HYBRID MODE | FIRST HOUR RATING HYBRID MODE GPH (LPH) |
|----------|--------|--------------------------|-------------------|---------|-----------------------------------|---|
| | | | WATTS UPPER/LOWER | VOLTS | | |
| HPTU-50N | 130 | 50 (189) | 4500/4500 | 208/240 | 3.45 | 66 (249) |
| HPTU-66N | 130 | 66 (250) | 4500/4500 | 208/240 | 3.45 | 79 (299) |
| HPTU-80N | 130 | 80 (303) | 4500/4500 | 208/240 | 3.45 | 86 (325) |

Requires 30 amp breaker.
Top T&P option not available.

DIMENSIONS & SHIPPING WEIGHT

| MODEL | INSTALLATION HEIGHT | TANK DIAMETER | HEIGHT TO UPPER SIDE CONNECTION | HEIGHT TO LOWER SIDE CONNECTION | HEIGHT TO DRAIN VALVE | HEIGHT TO T&P | SHIPPING WEIGHT |
|----------|---------------------|---------------|---------------------------------|---------------------------------|-----------------------|---------------|-----------------|
| | A IN (CM) | B IN (CM) | C IN (CM) | D IN (CM) | D IN (CM) | E IN (CM) | LB (KG) |
| HPTU-50N | 63 (160) | 22 (56) | 40 5/8 (103) | 3 3/4 (10) | 3 3/4 (10) | 40 1/2 (103) | 196 (89) |
| HPTU-66N | 61 (155) | 27 (69) | 38 (97) | 4 (10) | 4 (10) | 38 (97) | 289 (131) |
| HPTU-80N | 69 (175) | 27 (69) | 46 (117) | 4 (10) | 4 (10) | 46 (117) | 307 (139) |

ELECTRONIC USER INTERFACE

- User friendly, easy to read display
- LEDs clearly indicate the current operating mode
- Easily select operating mode:
 - Efficiency
 - Hybrid
 - Electric
 - Vacation
- Display communicates current status, mode and set point, and displays error messages when applicable



EFFICIENCY MODE

- Utilizes the heat pump for all water heating

HYBRID MODE

- Automatically reverts to heating element if ambient air or water temperatures are outside optimal operating range for heat pump
- Utilizes the heat pump or heating element, depending on demand

ELECTRIC MODE


- Standard electric water heater operation

VACATION MODE

- One touch operation maintains tank temperature of 60°F (15.6°C) during vacation or extended absence to reduce operating costs and provide freeze protection
- Programmable up to 99 days

OPTIONAL ACCESSORIES

- 100234320 Inlet and Outlet Air Duct Kit
- 100131328 Booster Fan Kit

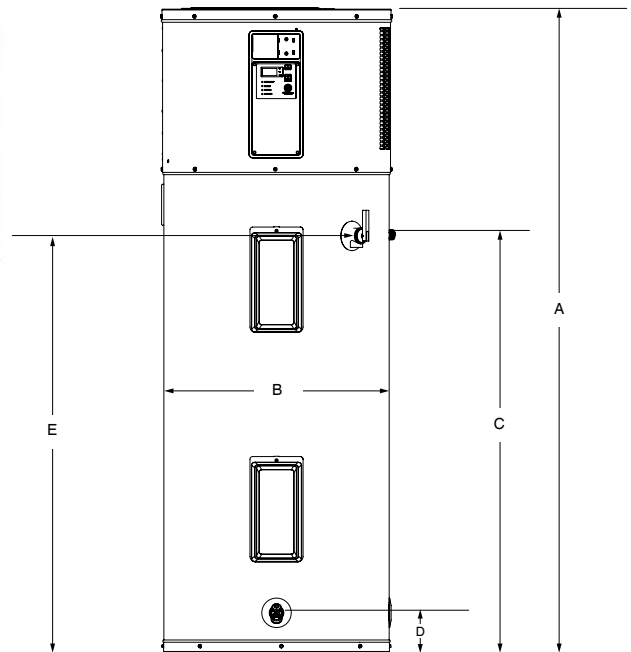

OTHER FEATURES:

- Environmentally-friendly non-CFC foam insulation
- Durable, enhanced-flow tamper-resistant brass drain valve
- CSA certified and ASME rated temperature & pressure relief valve

OPERATING REQUIREMENTS:

- Requires provision for condensate draining; if a suitable drain is not available, a condensate pump is required
- 208/240 VAC 60Hz single phase 30 amp power supply