



ENERGY STAR® QUALIFIED

# Power Direct Vent Water Heaters

The Power Direct Vent (PDV) features a sealed combustion chamber, low-profile design and state-of-the-art gas control for highly accurate and reliable temperature control. Perfect for both residential new home construction and replacement water heater applications, the Power Direct Vent will provide the ultimate solution for your hot water needs.

## SAVE MONEY ON ENERGY COSTS

- ENERGY STAR® qualified (except 75 gallon model)
- Exceed energy efficiency standards
- No heated indoor air used for combustion
- Factory-installed heat trap nipples reduce the amount of heat lost through piping

## DESIGNED FOR PERFORMANCE

- Exclusive TankSaver® design to prolong tank life
- Available for natural gas or propane
- Suitable for elevations up to 10,100 ft. (3,078 m)
- Maximum working pressure: 150 psi

## KEEPING YOU SAFE

- Sealed combustion chamber design prevents accidental ignition of flammable vapours

## EASY TO INSTALL AND MAINTAIN


- Low-profile design is ideal for replacement applications
- Compact design makes it great for tight space installations
- Convenient 3/4" side taps for combination applications on 50 USG high-input and 75 USG models
- Conveniently located T&P, drain valve, junction box and anode

## FLEXIBLE VENTING CONFIGURATIONS

- Can be vented with 2", 3" or 4" ULC S636 PVC, CPVC or polypropylene pipe up to 180 equivalent feet (see installation manual for full details)
- Can be installed using an optional concentric vent kit (see reverse or installation manual for full details)

## LIMITED TANK AND PARTS WARRANTY

- Consult written warranty on the back of this sheet, with documentation included with water heater or contact GSW for complete warranty information





ENERGY STAR® QUALIFIED

# Power Direct Vent Water Heaters

## PERFORMANCE

Tank Warranty	Model	Series	Capacity	Input	Maximum Certified Altitude	Recovery Rate at 90°F Temperature Rise	First Hour Rating	Energy Factor	BC/ON Compliant
Years***			USG (L)	BTU/h	FT (M)	GPH (LPH)	GPH (LPH)		
NATURAL GAS									
6	G640S40N-PDV-ES2	200	40 (151)	40,000	10,100 (3,078)	44 (167)	71 (269)	0.71	√
6	G650T45N-PDV-ES2	200	50 (189)	45,000	10,100 (3,078)	50 (189)	93 (352)	0.70	√
6	G650T58N-PDV-ES2*	200	50 (189)	58,000	5,400 (1,646)	67 (254)	100 (379)	0.71	√
6	G650T62P-PDV-ES2**	201	50 (189)	58,000	10,100 (3,078)	67 (254)	100 (379)	0.71	√
6	G675T72N-PDV-ES2	N/A	75 (284)	72,000	10,100 (3,078)	82 (310)	154 (583)	0.69	√


For propane models sub N for P. Natural gas models are series 200. Propane models are series 201.

\*Available in natural gas only.

\*\*Available in propane only.

\*\*\*In residential applications. Reduced warranty in commercial applications. Parts warranted for 1 year.


Side connections standard on 58,000 and 72,000 BTU high input models.

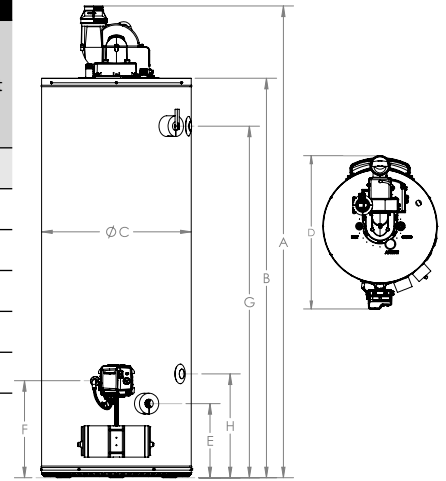

## DIMENSIONS & SHIPPING WEIGHT

Model	Installation Height	Height to Top of Tank	Tank Diameter	Overall Depth	Height to Drain Valve	Height to Gas Inlet	Height to T&P	Height to Upper Side Connection	Height to Lower Side Connection	Vent Diameter	Shipping Weight
	A IN (CM)	B IN (CM)	C IN (CM)	D IN (CM)	E IN (CM)	F IN (CM)	G IN (CM)	G IN (CM)	H IN (CM)	IN	LB (KG)
NATURAL GAS											
G640S40N-PDV-ES2	58 ¼ (148)	49 ½ (126)	22 (56)	29 ⅞ (76)	11 (28)	13 ¼ (34)	42 ½ (108)	N/A	N/A	2, 3 or 4	174 (79)
G650T45N-PDV-ES2	67 ½ (171)	58 ⅞ (150)	22 (56)	29 ⅞ (76)	11 (28)	13 ¼ (34)	51 ¾ (131)	N/A	N/A	2, 3 or 4	192 (87)
G650T58N-PDV-ES2	68 ⅞ (175)	60 ¼ (153)	22 (56)	29 ⅞ (76)	11 (28)	13 ¼ (34)	52 ¾ (134)	52 ¾ (134)	15 ¼ (39)	3 or 4	200 (91)
G650T62P-PDV-ES2											
G675T72N-PDV-ES2	70 ⅝ (179)	60 ½ (154)	26 (66)	33 ⅞ (86)	11 (28)	13 ¼ (34)	53 (135)	53 (135)	15 ¼ (39)	3 or 4	277 (126)

## PREFERRED INSTALLATION

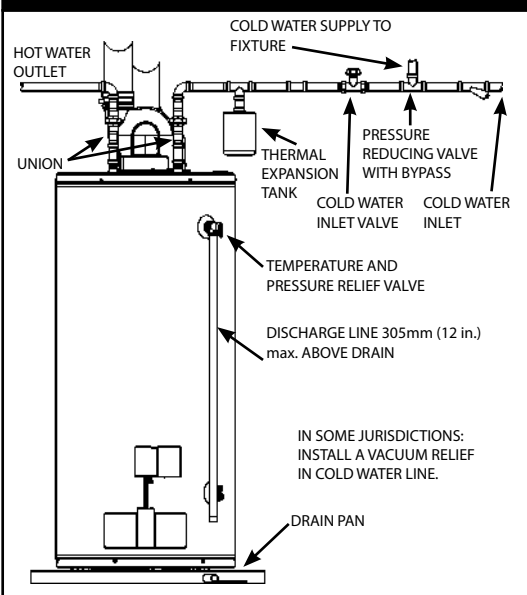

## VENT PIPE LENGTHS

Model	Vent Pipe Diameter IN	Minimum Number of Elbows Required*	Minimum Vent Length with One Elbow FT (M)		Maximum Equivalent Vent Length FT (M)	
			Concentric	2 Pipe	Concentric	2 Pipe
G640S40N-PDV-ES2	2	1	7 (2)	7 (2)	50 (15)	50 (15)
	3	1	7 (2)	7 (2)	100 (30)	125 (38)
G650T45N-PDV-ES2	2	1	7 (2)	7 (2)	50 (15)	50 (15)
	3	1	7 (2)	7 (2)	100 (30)	125 (38)
G650T58N-PDV-ES2	2	1	N/A	50 (15)	N/A	180 (55)
	3	1	N/A	50 (15)	N/A	180 (55)
G650T62P-PDV-ES2	3	1	7 (2)	7 (2)	45 (14)**	50 (15)
	4	1	N/A	50 (15)	N/A	125 (38)
G675T72N-PDV-ES2	3	1	7 (2)	7 (2)	30 (9)	50 (15)
	4	1	N/A	50 (15)	N/A	125 (38)

\* Refer to installation manual for further details.

\*\* 30 (9) for G650T62P-PDV-ES2

## OPTIONAL KITS

Description	Part Number
2" Vent Kit - Coupling, sound suppressor	330828-000
3" Vent Kit - Coupling, sound suppressor	330851-000
2" Concentric vent kit	9008586005
3" Concentric vent kit	9006328005
High ambient kit	9009024015